


# Package Information – SOT23-6

## 6-lead Surface Mounted Package

### Mechanical Case Outline

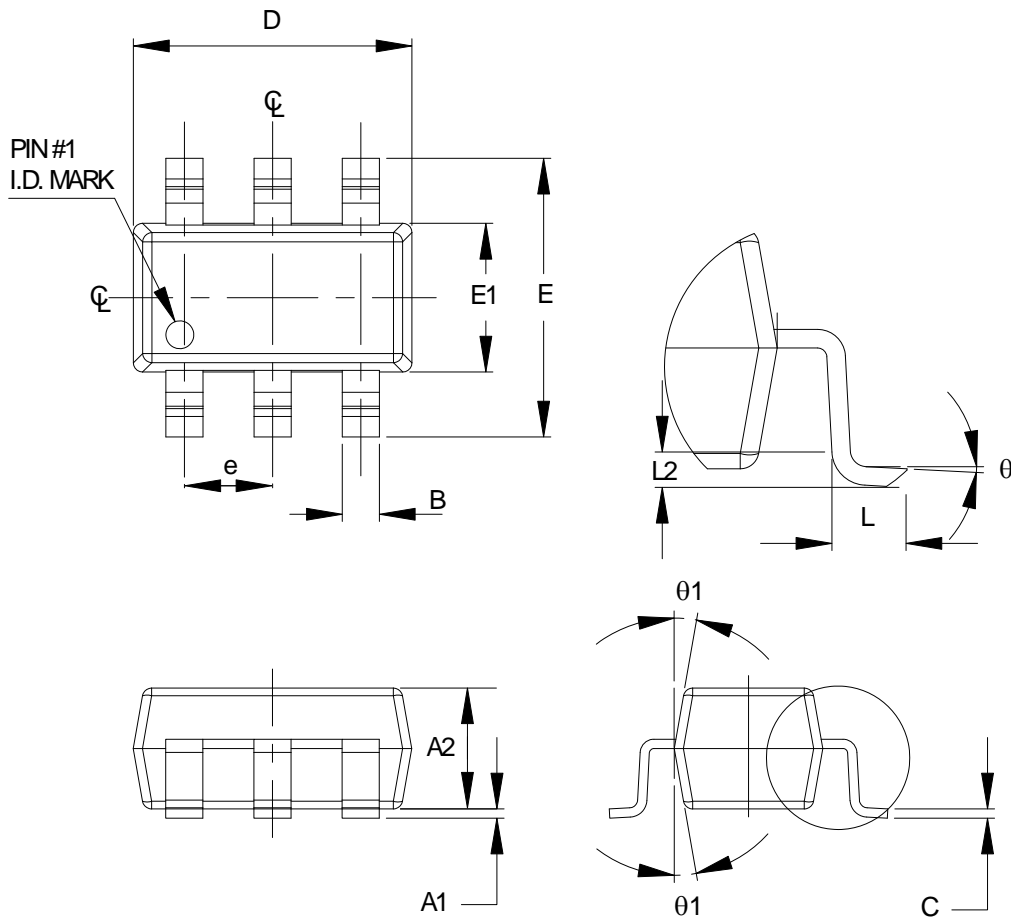


#### Notes

1. Lead finish is 8-23 microns of matt Sn.
2. Lead width and thickness exclusive of plating thickness.
3. Package outline is exclusive of any mould flashes and additional protrusions.
4. Moisture Sensitivity Level 1.
5. All dimensions are in millimetres.


A1	A2	B	C	D	e	E	E1	L	L2	θ	θ1
0.05 to 0.15	0.90 to 1.30	0.35 to 0.50	0.08 to 0.22	2.76 to 3.04	0.95 TYP	2.60 to 3.00	1.46 to 1.74	0.35 to 0.60	0.25 BSC	0° to 80°	5° to 15°

#### Soldering Footprint

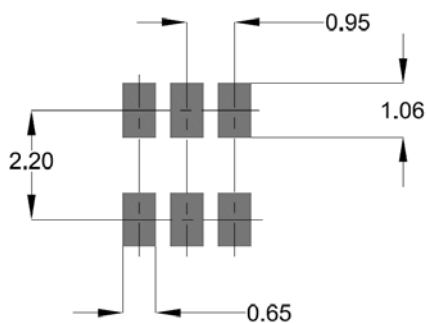

## Package Information – SOT23-6

### Package Marking

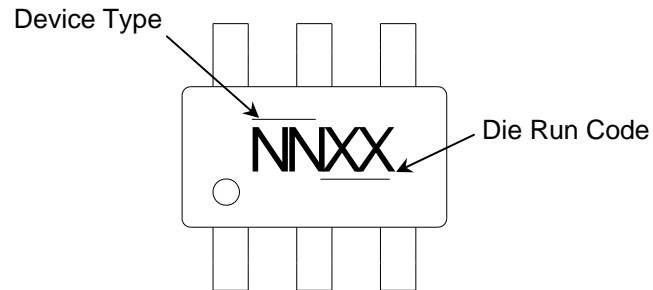

### Tape and Reel Information

Tape Width (mm)	Reel Size (inches)	No. of Components	No of Leader Pockets	No of Trailer Pockets	Tape Option Indicator
8	7	3,000	100	100	TR7
8	13	10,000	100	100	TR13

### Orientation

